



# AX16CL/AX8CL POLE ADAPTER

CODE: KPTPOLEAX16CL

## Assembly Instructions



### ASSEMBLY SEQUENCE

#### SUPPLIED MATERIALS

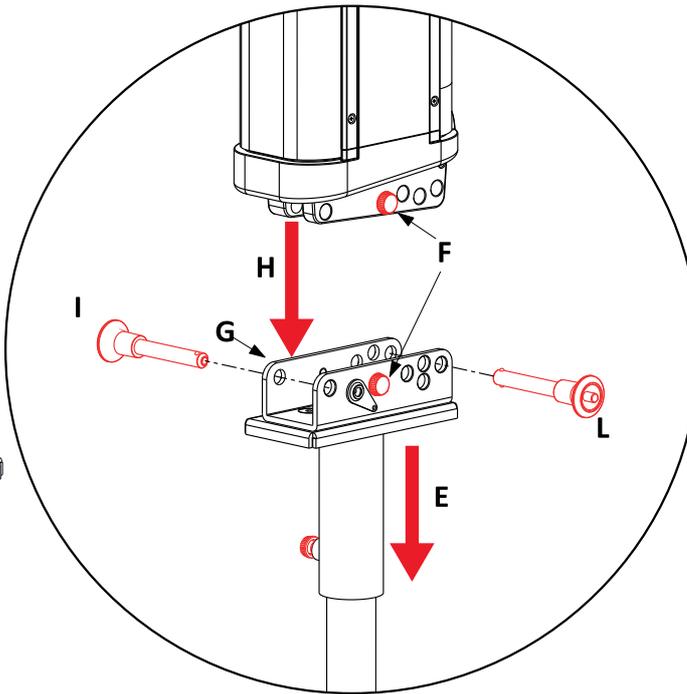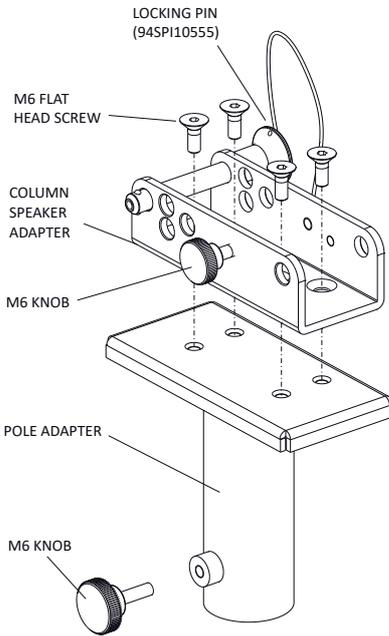


- 6 - Loosen the knobs (F) and (G).
- 7 - Place the column (H).
- 8 - Insert the front pin (I).
- 9 - Insert the rear pin (L).
- 10 - Tighten the knobs (F) and (G).

#### OPTIONAL MATERIALS

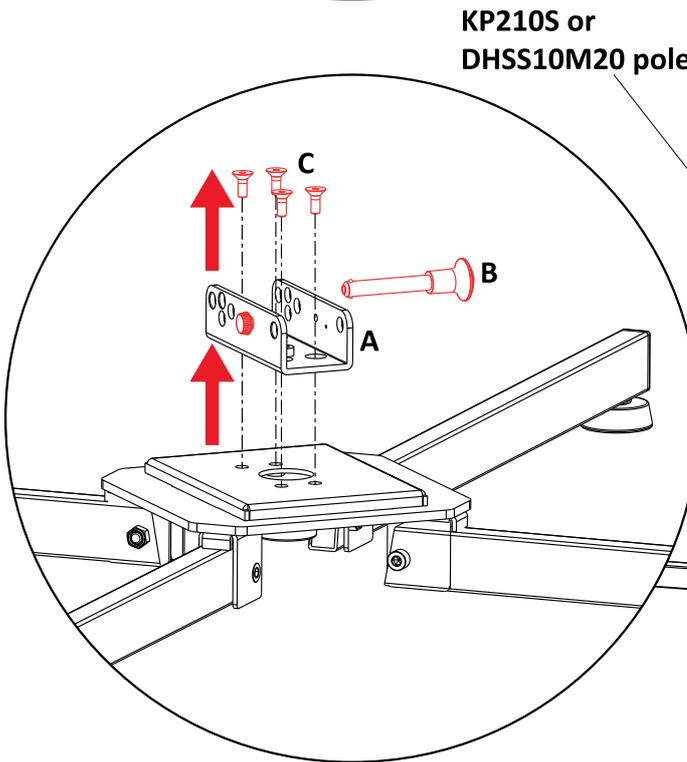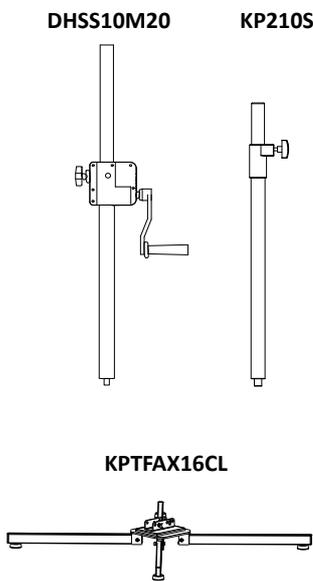

KP210S or  
DHSS10M20 pole

- 1 - Remove the Pin (B).
- 2 - Unscrew the 4 screws (C).
- 3 - Remove the flange (A) from base.
- 4 - Screw in the pole (D).
- 5 - Insert the pole adapter (E).



#### CONDITIONS OF USE

Proel do not accept any liability for damage caused to third parties due to improper installation, use of non-original spare parts, lack of maintenance, tampering or improper use of this product, including disregard of acceptable and applicable safety standards. Proel strongly recommends that this loudspeaker cabinet be suspended taking into consideration all current National, Federal, State and Local regulations. The product must be installed by qualified personnel only. Please contact the manufacturer for further information.

#### WARNING:

- The ground where the KPTFAX16CL floor stand is placed needs to be stable and compact.
- Adjust the feet so to put the KPTFAX16CL perfectly horizontal. Use a spirit level to obtain the best result.
- Always secure ground stacked setups against movement and possible tipping over.
- A maximum of 1 x AX16CL or 2 x AX8CL speakers are allowed to be installed over a KPTFAX16CL with pole serving as ground support.
- The column must be setup with 0° aiming.

