AX16CL/AX8CL WALL BRACKETS
CODE: KPTWAX16CLL
Assembly Instructions

SUPPLIED MATERIALS

COLUMN SPEAKER ADAPTER

LOCKING PIN (94SPI10555)

M6 KNOB

WALL BRACKET (LIGHT VERSION)

M8 WASHER

M8x16 NUT SCREW

DIMENSIONS and DRILLING

16.4 cm
6.47"

13.9 cm
5.49"

7.5 cm
2.95"

4.5 cm
1.77"

1.1 cm
0.433"

0° PIN HOLE

ø 7 mm
0.276"

2.0 cm
0.787"

2.8 cm
1.1"

0° PIN HOLE
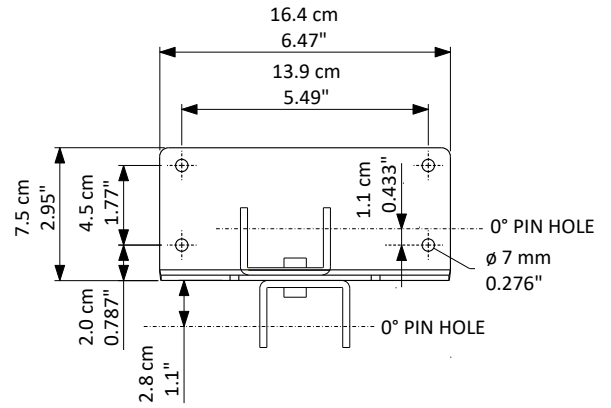
TYPICAL TOP ASSEMBLY

THIS HOLE ALLOWS THE PASSAGE OF A SPEAKON CABLE

28.8 cm
11.3"

8.36 cm
3.29"

LOCKING PIN INSERTION
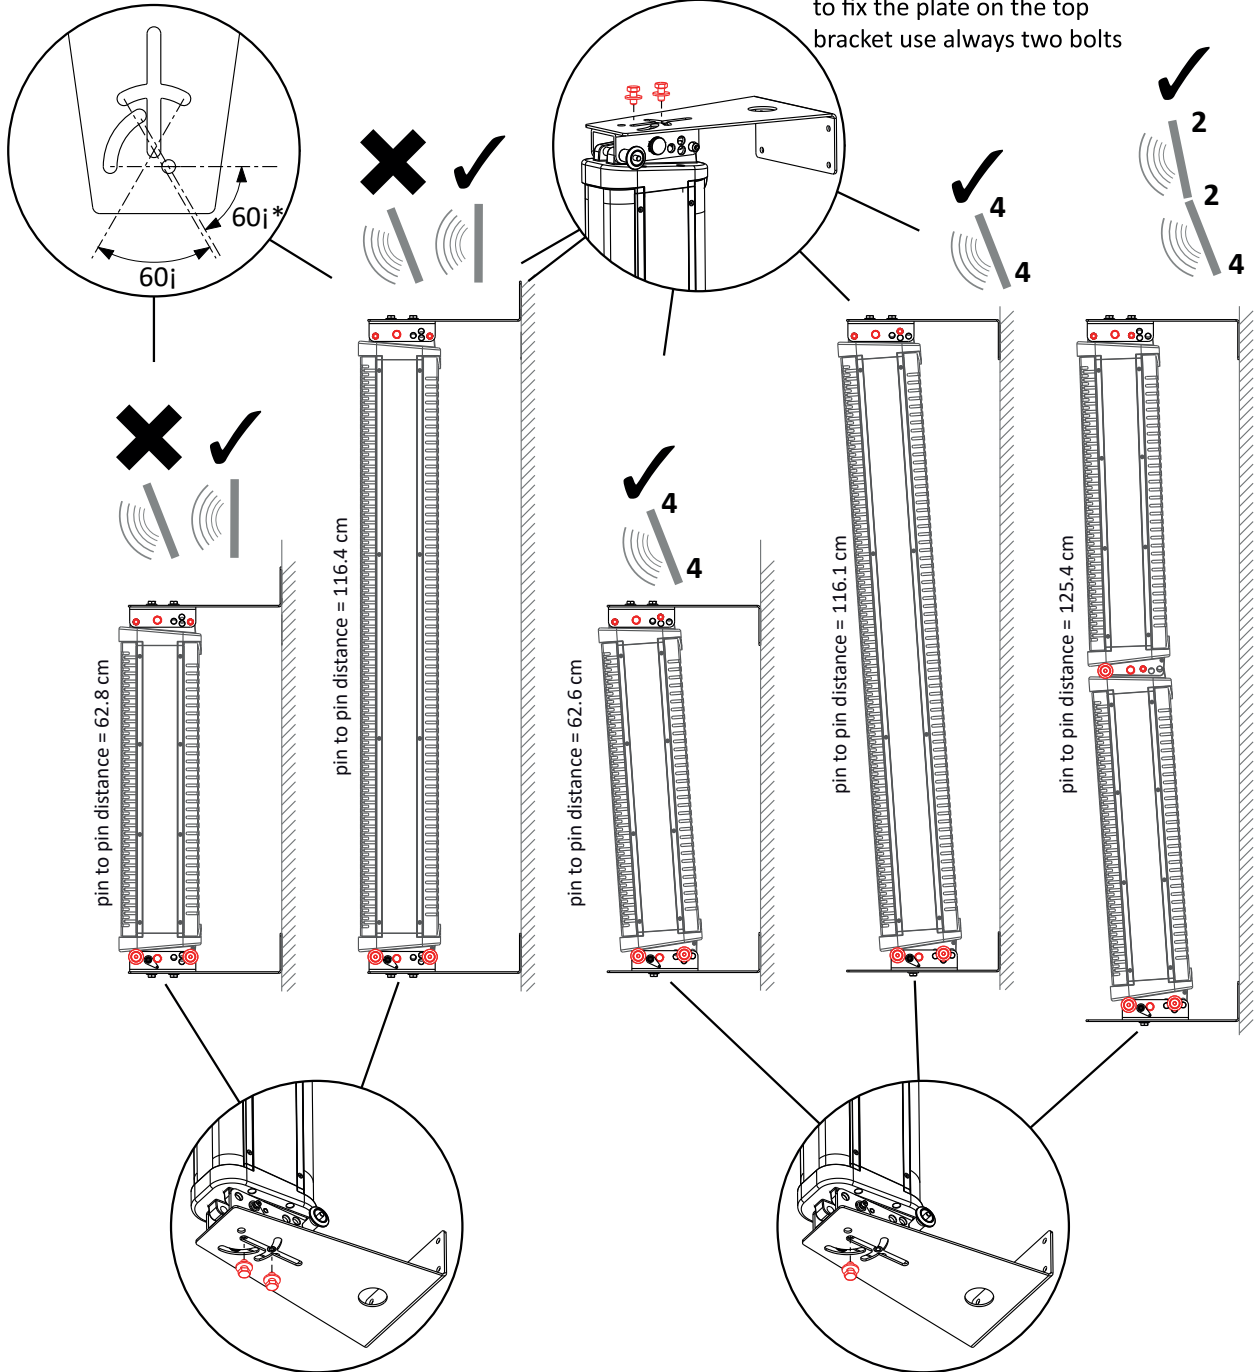
press and insert

release and lock
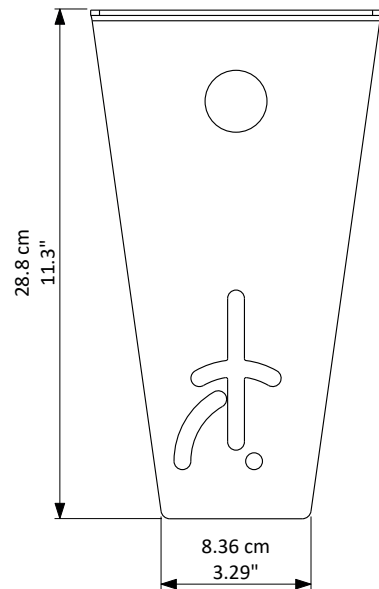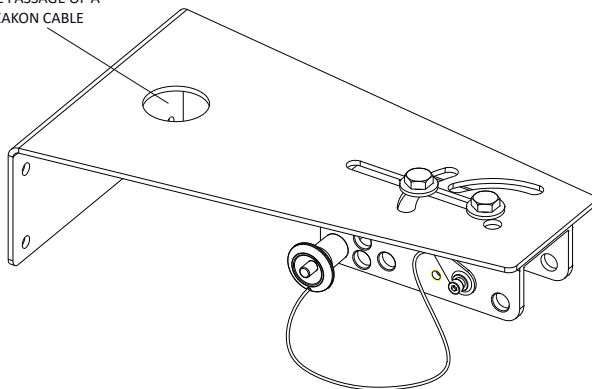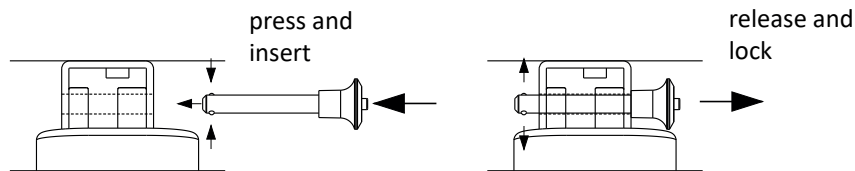
WARNINGS:

- No hardware is supplied to install the KPTWAX16CLL to the walls: the hardware to be used depends on the wall structure. Use always the best hardware available, taking in consideration the whole weight of loudspeakers and accessories.
- Brackets MUST be installed by qualified personnel in accordance with safe installation practices.
- A single AX16CL or 2x AX8CL speakers can be installed using the KPTWAX16CLL as top and bottom wall brackets.
- KPTWAX16CLL can be used also in combination with KPTWAX16CL as bottom bracket for 2x AX16CL speakers.

AX16CL/AX8CL WALL BRACKETS
CODE: KPTWAX16CLL
Assembly Instructions

ASSEMBLY SEQUENCE

Column orientation is possible only aiming it at 0°.
*to use these angle setup top and bottom
brackets must be have same orientation.

60j *
60j

to fix the plate on the top
bracket use always two bolts

✔
2
2
4

✖ ✔

✔ 4
4

✖ ✔

✔ 4
4

pin to pin distance = 62.8 cm

pin to pin distance = 116.4 cm

pin to pin distance = 62.6 cm

pin to pin distance = 116.1 cm

pin to pin distance = 125.4 cm

to fix the plate on the bottom bracket use two bolts (0°) or a single bolt (4° downward).

CONDITIONS OF USE

Proel do not accept any liability for damage caused to third parties due to improper installation, use of non-original spare parts, lack of maintenance, tampering or improper use of this product, including disregard of acceptable and applicable safety standards. Proel strongly recommends that this loudspeaker cabinet be suspended taking into consideration all current National, Federal, State and Local regulations. The product must be installed by qualified personnel only. Please contact the manufacturer for further information.